


Wall mounted unit

FTXP-L + RXP-L



Energy saving during standby mode

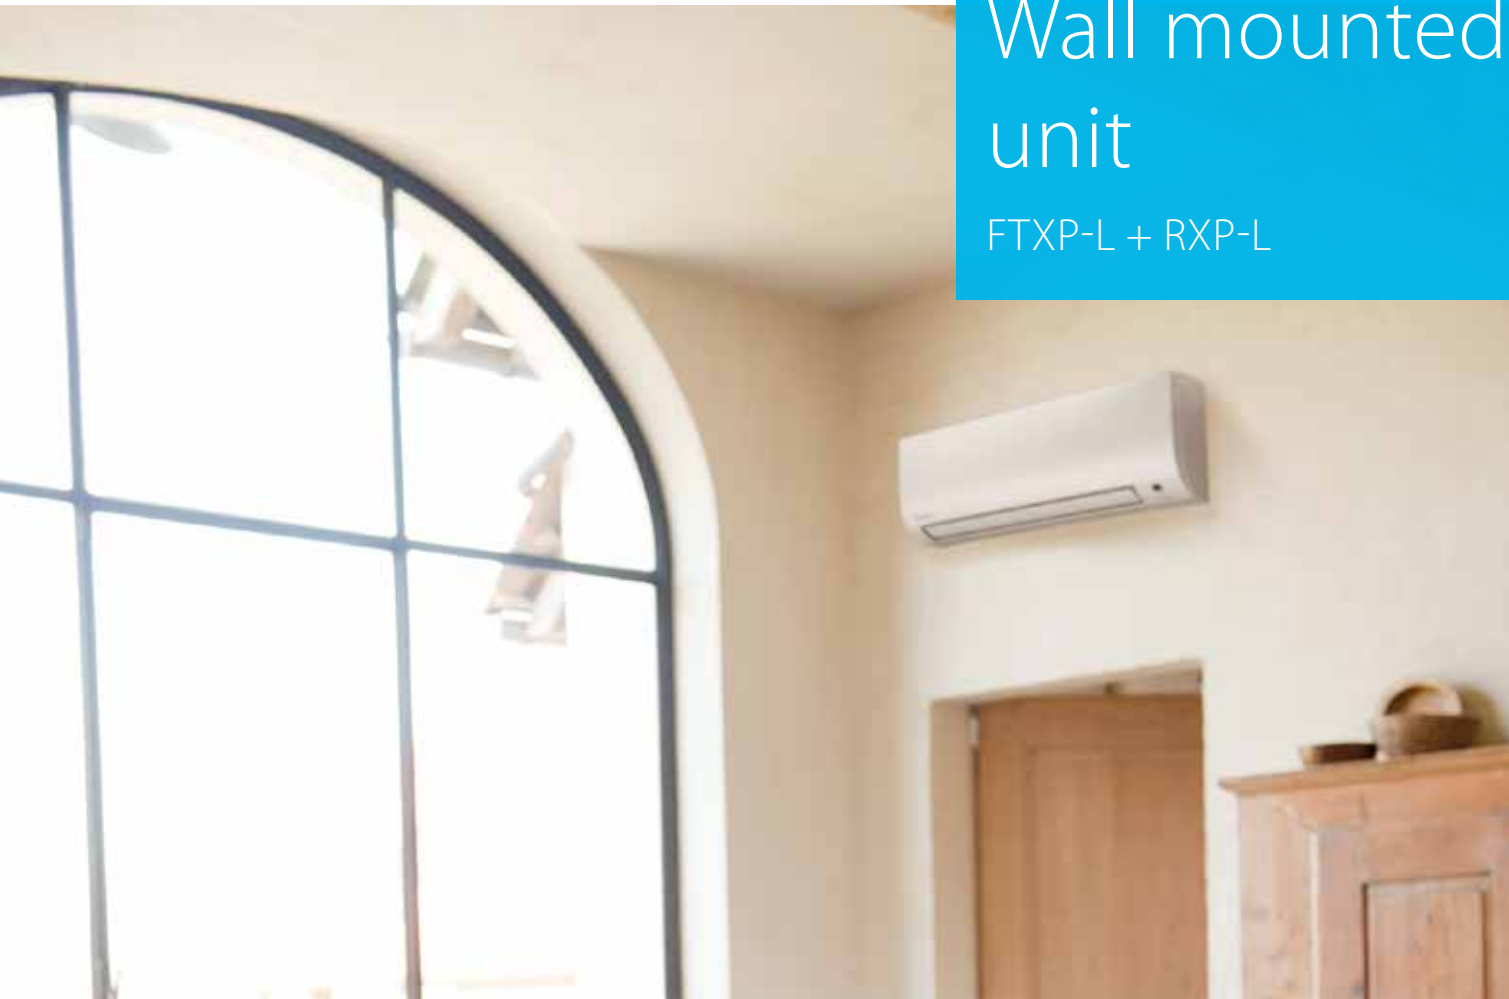

Online controller via app



Multi model application

Discreet wall mounted unit providing high efficiency and comfort

- › Whisper quiet
- › Online controller (optional)
- › Ideal for above door installation
- › Bluevolution range: lower environmental impact

- › Seasonal efficiency values up to A++ in cooling and heating
- › Space saving contemporary wall mounted design

FTXP-L + RXP-L



Efficiency data		FTXP + RXP	20L + 20L	25L + 25L	35L + 35L	50L + 50L	60L + 60L	71L + 71L	
Cooling capacity	Min./Nom./Max.	kW	1.3/2.00/2.6	1.3/2.50/3.0	1.3/3.50/4.0	1.7/5.0/6.0	1.7/6.0/7.0	2.3/7.1/7.3	
Heating capacity	Min./Nom./Max.	kW	1.30/2.50/3.50	1.30/3.00/4.00	1.30/4.00/4.80	1.7/6.0/7.70	1.7/7.0/8.00	2.3/8.2/9.00	
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.50/0.72	0.31/0.65/0.72	0.29/1.01/1.30	0.320/1.385/1.826	0.449/2.689/3.274	
	Heating	Min./Nom./Max.	kW	0.25/0.52/0.95	0.25/0.69/0.95	0.29/1.00/1.29	0.440/1.579/2.356	0.456/1.928/2.787	
Space cooling	Energy efficiency class		A++						A
	Capacity	Pdesign	kW	2.00	2.50	3.50	5.00	6.00	7.10
	SEER			6.79	6.92	6.62	6.72	6.82	5.30
	Annual energy consumption		kWh/a	104	127	186	261	308	469
Space heating (Average climate)	Energy efficiency class		A++			A+		A	
	Capacity	Pdesign	kW	2.20	2.40	2.80	4.60	4.80	6.20
	SCOP/A			4.65	4.61	4.64	4.10		3.81
	Annual energy consumption		kWh/a	662	728	845	1,570	1,637	2,278
Nominal efficiency	EER		4.02	3.83	3.49	3.61	3.29	2.64	
	COP		4.77	4.36	4.02	3.80	3.63	3.19	
	Annual energy consumption		kWh	-			693	912	1,345
	Energy labeling Directive	Cooling/Heating		A/A			-/-		

Indoor unit		FTXP	20L	25L	35L	50L	60L	71L	
Dimensions	Unit	HeightxWidthxDepth	286x770x225			295x990x263			
Weight	Unit	kg	9.00			13.5			
Air filter	Type	Removable / washable							
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m ³ /min	4.4/5.9/7.9 / 9.8	4.4/6.1/8.1 / 10.1	4.5/6.3/8.3 / 11.5	10.5/11.9/14.4 / 16.8	10.7/12.2/14.8 / 17.3
		Heating	Silent operation/Low/Medium/High	m ³ /min	5.3/6.5/8.4 / 10.3	5.3/6.7/8.6 / 10.3	5.3/7.0/9.0 / 11.5	10.7/12.2/14.8 / 17.3	11.3/12.8/15.8 / 17.9
Sound power level	Cooling		dBA	55		58	59	60	62
	Heating		dBA	55		58	61	62	
Sound pressure level	Cooling	Silent operation/Low/High	dBA	20/25/39	20/26/40	20/27/43	31/34/43	33/36/45	34/37/46
	Heating	Silent operation/Low/High	dBA	21/28/39	21/28/40	21/29/40	30/33/42	32/35/44	33/36/45
Control systems	Infrared remote control	ARC480A11							
	Wired remote control	BRC944B2 / BRC073A1			BRC073A1				
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240						

Outdoor unit		RXP	20L	25L	35L	50L	60L	71L	
Dimensions	Unit	HeightxWidthxDepth	550x658x275			734x870x373			
Weight	Unit	kg	28			46.0	50.0		
Sound power level	Cooling		dBA	60		62	61	63	66
	Heating		dBA	61		62	61	63	65
Sound pressure level	Cooling	Nom./High	dBA	-/46		-/48	47/-	49/-	52/-
	Heating	Nom./High	dBA	-/47		-/48	49/-		52/-
Operation range	Cooling	Ambient	Min.-Max.	°CDB			-10~-46		
	Heating	Ambient	Min.-Max.	°CWB			-15~-18	-15~-18	
Refrigerant	Type	R-32							
	GWP	675.0							
	Charge	kg/TCO2Eq	0.70/0.48			0.90/0.61	1.15/0.78		
Piping connections	Liquid	OD	mm			6,4			
	Gas	OD	mm			12,7			
	Piping length	OU - IU	Max.			m			
	Additional refrigerant charge		kg/m						
	Level difference	IU - OU	Max.			m			
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240						
Current - 50Hz	Maximum fuse amps (MFA)	A	-			16			

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECEN18 - 046A 03/18



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

Rua Vale Paraíso - Ponte de Eiras | 3020-501 Coimbra
Tel.: 239 433 690 www.electroclima.pt
Email: electroclima@electroclima.pt



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.